

Steel-Strip

(Special brochure on strip steel, extract from our Delivery-program)

Cold stripe

Grades: DC01, DC03, DC04 DC05
H 240 LA - H 400 LA
Strength: LC, C290, C340, C390, C440,
C490, C590, C690
Thickness: 0,30 - 4,00 mm
Width: 4,00 - 320,00 mm

C-Steels

Grades: C10 E - C75 S
Thickness: 0,30 - 4,00 mm
Width: 4,00 - 320,00 mm

Hot stripe


Grades: DD11 - DD14, S 315 MC - S 700 MC
Thickness: 1,50 - 6,00 mm

also as a equaled hot stripe with close thickness tolerances

Our particular strength - **precision-narrowband**
with the greatest straightness and the tightest tolerances

Thickness tolerance: +/- 0,01 mm
Width tolerance: +/- 0,10 mm

For all grades

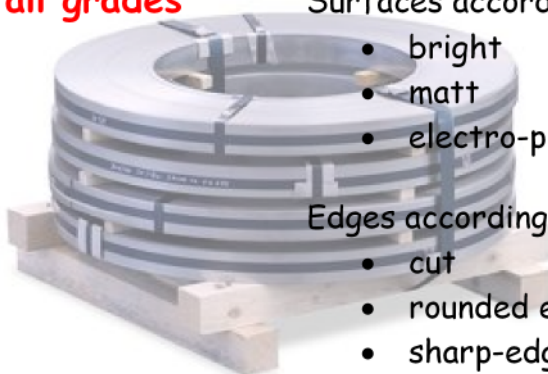

Surfaces according to your wishes

- bright
- matt
- electro-plated (galvanized, tinned, copper-plated)

Edges according to your wishes

- cut
- rounded edges
- sharp-edges

Rings according to your wishes

- single-layered
- packing winding

GMBH

Welm GmbH
Max-Wagenbauer-Straße 11a
85567 Grafing
Germany

phone: +49 8092 85253-0
fax: +49 8092 85253-10
e-mail: info@welm.de
internet: www.welm.de